

2AMCV718WDBPS

Converter WIFI/PUSH to DALI broadcast with integrated BUS DALI power supply

Device Wifi to DALI converter with push interface.
 Integrated DALI bus power supply for up to 16 devices.
 Input Range: 100-240V AC 50/60Hz.
 Controllable with Android/iOS app IoT Light Smart.


Input Controls	
Type	Qty
Not insulated Push button	1
Wifi	1

Output Sync	
Type	Qty
DALI	1



TECHNICAL NOTES

- Device Wifi to DALI converter with push interface.
 - Integrated DALI bus power supply for up to 16 devices.
 - Input Range: 100-240V AC 50/60Hz.
 - The device is not equipped with earth connection
- Protection against accidental contact with live parts is guaranteed by the enclosure.
- Power Connector Cross-section of conductors 14-30 AWG (0.05-2.08 mmq).
 - Controllable with Android/iOS app IoT Light Smart.
 - Input Controls: Not insulated Push button x1, Wifi x1.
 - Output Sync: DALI x1.
 - Printed Circuit UL.
 - Protection Class: IP20.
 - Standard Dimension 40x80x24.45 mm.
 - Dimension with accessories 40x100x24.45 mm.
 - Works with Hey Google.
 - Compatible with Amazon Alexa Voice Assistant through the skill IoTLight.
 - Works with IFTTT.
 - All connections must be made with non-live devices and carried out by specialized personnel.
 - Use only in dry conditions.
 - Google and all related marks are trademarks of Google Inc. or its affiliates.
 - Amazon, Alexa, and all related marks are trademarks of Amazon.com, Inc. or its affiliates..
 - IFTTT and all related marks are trademarks of IFTTT Inc. or its affiliates.

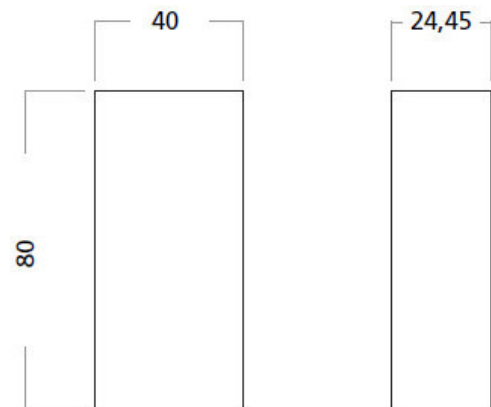

CODE	INPUT VOLTAGE	CONTROL INPUTS	CASE	DIMENSION mm
2AMCV718WDBPS	100-240V AC	Not insulated Push button x1 Wifi x1	YES	40x80 h 24.45