

2AMDI715TPWS

Phase cut dimmer WIFI

Monochannel Dimmers with Output phase cut.

Input Range: 80-240V AC 50Hz.

Controllable with Android/iOS app IoT Light Smart.

Input Controls	
Type	Qty
Insulated Push button	1
Wifi	1

TECHNICAL NOTES

- Monochannel Dimmers with Output phase cut.

- Input Range: 80-240V AC 50Hz.

- Max resistive load 1A.

*For Electronic and/or LED Electronic loads

consider the maximum half power compared to the nominal value

Example: 220V AC 110W Max. Do not connect inductive loads

Do not connect UPS with output different from Pure Sine Wave.

- The device is not equipped with earth connection

Protection against accidental contact with live parts is guaranteed by the enclosure.

- Cross-section of conductors 14-22 AWG (0.205-2.08 mmq).

- Controllable with Android/iOS app IoT Light Smart.

- Input Controls: Insulated Push button x1, Wifi x1.

- Printed Circuit UL.

- Protection Class: IP20.

- Standard Dimension 40x80x24.45 mm.

- Dimension with accessories 40x100x24.45 mm.

- Works with Hey Google.

- Compatible with Amazon Alexa Voice Assistant through the skill IoTLight.

- Works with IFTTT.

- Surge voltage protection.

- Over current protection.


- Use only in dry conditions.

- Google and all related marks are trademarks of Google Inc. or its affiliates.

- Amazon, Alexa, and all related marks are trademarks of Amazon.com, Inc.

or its affiliates..

- IFTTT and all related marks are trademarks of IFTTT Inc. or its affiliates.

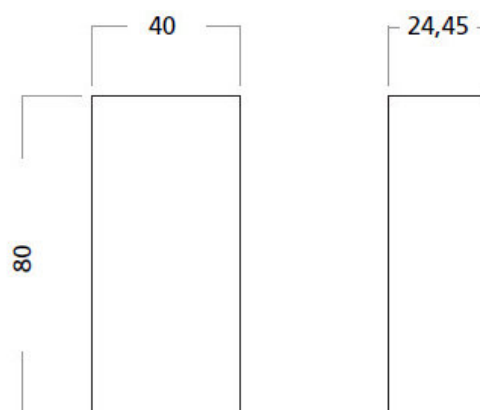

WIFI



CODE	INPUT VOLTAGE	(MAX) OUTPUT CURRENT	N. OUTPUT CHANNELS	MAX OUTPUT POWER	CONTROL INPUTS	CASE	DIMENSION mm
2AMDI715TPWS	80-240V AC	from 0A to 1A	1	230W @ 230V AC*	Insulated Push button x1 Wifi x1	YES	40x80 h 24.45