

2AMDI715TPWS

Phase cut dimmer WIFI

Monochannel Dimmers with Output phase cut.

Input Range: 80-240V AC 50Hz.

Controllable with Android/iOS app IoT Light Smart.



Input Controls	
Type	Qty
Insulated Push button	1
Wifi	1

TECHNICAL NOTES

- Monochannel Dimmers with Output phase cut.
 - Input Range: 80-240V AC 50Hz.
 - Max resistive load 1A.
- *For Electronic and/or LED Electronic loads consider the maximum half power compared to the nominal value
Example: 220V AC 110W Max. Do not connect inductive loads

Do not connect UPS with output different from Pure Sine Wave.

- The device is not equipped with earth connection
- Protection against accidental contact with live parts is guaranteed by the enclosure.
- Cross-section of conductors 14-22 AWG (0.205-2.08 mmq).
- Controllable with Android/iOS app IoT Light Smart.
- Input Controls: Insulated Push button x1, Wifi x1.
- Printed Circuit UL.
- Protection Class: IP20.
- Standard Dimension 40x80x24.45 mm.
- Dimension with accessories 40x100x24.45 mm.
- Works with the Google Assistant.
- Compatible with Amazon Alexa Voice Assistant through the skill IoTLight.
- Works with IFTTT.
- Surge voltage protection.
- Over current protection.
- Use only in dry conditions.

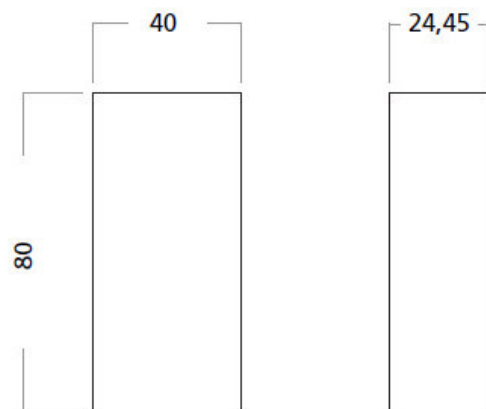

CODE	INPUT VOLTAGE	(MAX) OUTPUT CURRENT	N. OUTPUT CHANNELS	MAX OUTPUT POWER	CONTROL INPUTS	CASE	DIMENSION mm
2AMD1715TPWS	80-240V AC	from 0A to 1A	1	230W @ 230V AC*	Insulated Push button x1 Wifi x1	YES	40x80 h 24.45