

2AMCV719ZDS

Converter ZIGBEE to DALI broadcast with integrated BUS DALI power supply

Device Zigbee HA 1.2 to DALI converter.

Integrated DALI bus power supply for up to 16 devices.

Input Range: 100-240V AC 50/60Hz.


Input Controls	
Type	Qty
Not insulated Push button	1
Zigbee	1

Output Sync	
Type	Qty
DALI	1



TECHNICAL NOTES

- Device Zigbee HA 1.2 to DALI converter.
 - Integrated DALI bus power supply for up to 16 devices.
 - Input Range: 100-240V AC 50/60Hz.
 - The device is not equipped with earth connection
- Protection against accidental contact with live parts is guaranteed by the enclosure.
- Power Connector Cross-section of conductors 14-30 AWG (0.05-2.08 mmq).
 - Input Controls: Not insulated Push button x1, Zigbee x1.
 - Output Sync: DALI x1.
 - Printed Circuit UL.
 - Protection Class: IP20.
 - Standard Dimension 40x80x24.45 mm.
 - Dimension with accessories 40x100x24.45 mm.
 - Compatible with Amazon Alexa PLus and Echo Show 10 inch.
 - All connections must be made with non-live devices and carried out by specialized personnel.
 - Use only in dry conditions.

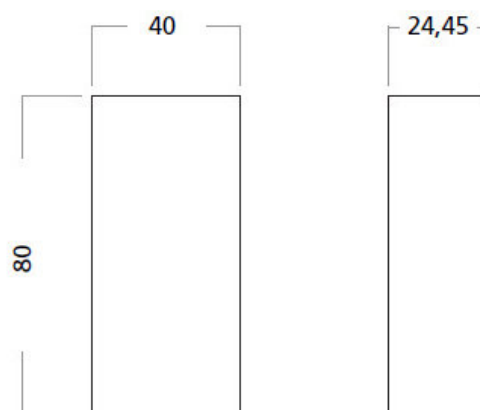

CODE	INPUT VOLTAGE	CONTROL INPUTS	CASE	DIMENSION mm
2AMCV719ZDS	100-240V AC	Not insulated Push button x1 Zigbee x1	YES	40x80 h 24.45